


Location Map

خارطة الموقع

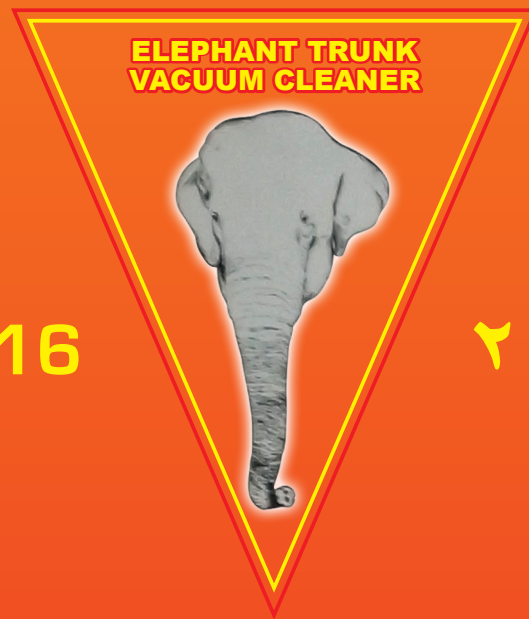

Catalogue 2016

كتالوج ٢٠١٦



مصنع الجاهمة
Al Jalahma Factory

P.O. BOX 686, MANAMA, KINGDOM OF BAHRIN
Tel: +973 17410218 / +973 17413502
Fax: +973 17413640
Email: info@aljahmaest.com
www.aljahmaest.com

ص.ب: ٦٨٦ ، المنامة ، مملكة البحرين
هاتف: ٠٠٩٧٣١٧٤١٠٢١٨ / ١٧٤١٣٥٠٢
فاكس: ٠٠٩٧٣١٧٤١٣٦٤٠
البريد الالكتروني: info@aljahmaest.com
الموقع الالكتروني: www.aljahmaest.com



مصنع الجاهمة
Al Jalahma Factory



TR-22



TR-11



TR-16.5

نموذج الاختيار لخدمة المحطات
MODEL OF CHOICE FOR SERVICE STATIONS

نموذج الاختيار لخدمة المحطات

المكنسة الكهربائية ET تعتبر أعلى تقنية هندسية وهي سهلة التركيب والاستخدام حيث أنها متينة الصنع ذات قوة خارقة على شفط الأتربة بواسطة خرطومها.

الماكينة من إنتاج مصنع الجلاهمة للمكانس الكهربائية الذي يقدم أفضل خدمات ما بعد البيع ونحن نساعدك في اختيار أفضل الماكينات التي تحتاجها و نوفر لك جميع قطع الغيار.

كل المكانس المتوفرة لدينا يمكن تركيب الفلتر وتنظيف خزان الأتربة بكل سهولة وهذا النوع من المكانس ذات سطح من ستيل المطلي بأصباغ مقاومة للصدأ وطويلة الأمد.

MODEL OF CHOICE FOR SERVICE STATIONS

ET Vacuum Systems give you high visibility and are easy to maintain. Engineered for simple installation and ease of use. It is heavy-duty, powerful and capable of strong suction at each of the hose drops.

With Al Jalahma Factory, you get a total system approach including services before and after the sale. We help you to layout a system and choose the right vacuum equipment, accesories, vacuum tubing to create a total package of cleaning power.

All vacuums feature easy access to filter bags and dust containment chamber. Our full range is galvanized and dry powder coated which provides durable corrosion resistance for easy care and a long-lasting appearance.



TR-11

E. T. Vacuum Cleaner (Dry) TR-11 (Galvanized and Powder Coated filter unit) Equipped with two powerful turbines, Vacuum Relief Valve and External Silencer and with Polyester star filter (99.99% efficiency) with following details:
Suitable for 38mm x 4 outlets with standard hose length 5 meter each and depending upon total length and Bends used in service line. Supplied with 38mm x 5meter - 4 sets Flexible Hose, Duckfoot Cleaning Tool, Hose Adaptor, PVC Adaptor and Tool Hangers.



TR-16.5

E. T. Vacuum Cleaner (Dry) TR-16.5 (Galvanized and Powder Coated filter unit) Equipped with three powerful turbines, Vacuum Relief Valve and External Silencer and with Polyester star filter (99.99% efficiency): with following details:
Suitable for 38mm x 4 to 6 outlets with standard hose length 5 meter each and depending upon total length and Bends used in service line. Supplied with 38mm x 5meter - 6 sets Flexible Hose, Duckfoot Cleaning Tool, Hose Adaptor, PVC Adaptor and Tool Hangers.



TR-22

E. T. Vacuum Cleaner (Dry) TR-22 (Galvanized and Powder Coated filter unit) Equipped with four powerful turbines, Vacuum Relief Valve and External Silencer and with Polyester star filter (99.99% efficiency) with following details:
Suitable for 38mm x 8 outlets OR 50mm x 6 outlets with standard hose length of 5 meter each and depending upon total length and Bends used in service line. Supplied with 38mm x 5meter - 8 sets OR 50 mm x 5 meter - 6 sets Flexible Hose, Duckfoot Cleaning Tool, Hose Adaptor, PVC Adaptor and Tool Hangers.

SPECIFICATIONS:

DETAILS / MODEL	UNIT	TR-11		TR-16.5		TR-22	
CAPACITY OUTLETS	Hose - Nos.	38mm x 5 meter - 4 Nos.		38mm x 5 meter - 6 Nos.		38mm x 5 meter - 8 Nos. or 50mm x 5 meter - 6 Nos.	
PHASE	Ph.	Three Δ - Y		Three Δ - Y		Three Δ - Y	
POWER	kW	8	9.2	12	13.8	16	18.4
	HP	11	12.4	16.5	18.6	22	24.8
FREQUENCY	Hz	50	60	50	60	50	60
VOLTAGE	V	220-240/380-440	220-240/380-440	220-240/380-440	220-240/380-440	220-240/380-440	220-240/380-440
CURRENT	A	29.4-29.6/16.4-18	37.4-30.8/19-17.2	44.1-44.4/24.6-27	56.1-46.2/28.5-25.8	58.8-59.2/32.8-36	74.8-61.6/38-34.4
VACUUM	mBar	520	620	790	920	1020	1180
AIR FLOW	m ³ /hr.	610	735	903	1095	1204	1460
OVERALL DIMENSIONS	mm	L - 1450 x W - 880 x H - 1350		L - 1500 x W - 880 x H - 1600		L - 1750 x W - 1100 x H - 1900	